

Enbio S

Process times

All process times are drying included.
Start-to-end, from instrument insertion
to having them ready.

Unwrapped
FAST / 134°C
7 min

Wrapped
Class B / 134°C
15 min

Wrapped
Class B / 121°C
30 min

56 cm



25 cm




Unit weight
15 kg

15 cm



Load capacity per process

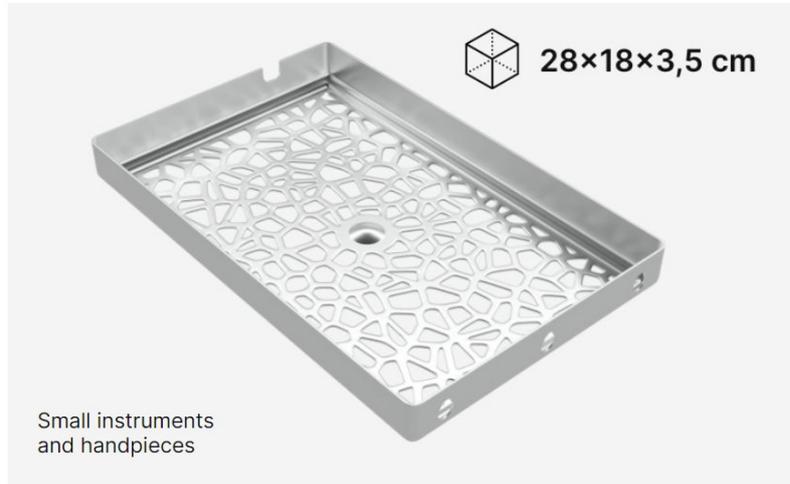

Usable load space



Data archiving

All process data is automatically
written to a USB disk.



Process reports

Dedicated software for process
data reading and printing.



Water supply

Enbio uses distilled water from
an external tank.



Power supply

The Enbio S works with any
typical electrical outlet.



Electrical

Power supply	230V/50Hz
Installed power	2250 W
Max. power consumption	10 A

Pressure and temperature

Working pressure	2.1 Bar
Max. pressure	2.3 Bar
Max. process temperature	137°C

Miscellaneous

Ingress protection	IP20
Data archiving	USB stick
Water conductivity*	< 15 µS/cm



Class B

Vacuum
Pouches+
drying



Medical Certified

Medical device class II b
EN-13060 / 98/42/EEC Directive
FDA Approved



Distributed by:

ICONA

DESIGNED WITH YOU IN MIND

Trade Central Business Park
Unit 12/37 Keilor Park Drive
Keilor Park Vic 3042

Ph: 1300 442 662
sales@icona.net.au
www.icona.net.au



Enbio Group AG
Eichengasse 3, 4702 Oensingen
Switzerland

enbio.com